



## Termix VX Compact 32

### Indirect substation for apartment buildings

District heating substation for indirect heating with electronic controls. Designed for wall-mounting.

#### Application

The Termix VX Compact 32 is a complete solution for space heating with optimal safety, efficient energy transfer, service-friendly construction and a compact design. The substation is applicable, if a heat exchanger is required or on a conversion to district heating, where the existing equipment is unsuitable for direct connection. The Termix VX Compact 32 substation is ideal, where a high level of security against burst pipes and water damage in the heating system is required.

#### District heating (DH)

The district heating circuit is prefabricated with a flow controller with integrated control valve, thermometers and ball valves.

#### Heating (HE)

The heating circuit consists of a plate heat exchanger, safety valve, mano-

meter, thermometers, ball valves, drain valve, air valve and circulation pump. The heating temperature can be controlled thermostatically or by an electronic controller with an outdoor temperature sensor. Depending on the application, different heat exchangers dimensioned for central or floor heating will be applied.

#### Domestic hot water (DHW)

Termix VX Compact 32 is supplied with connection pipes for a DHW tank on the supply line.

#### Options

As an option the substation can be equipped with a thermostat with safety monitor. This option is only possible for substations with electronic controller. Furthermore the substation can be supplied with a differential pressure controller and separate motorized valves.

#### Construction


All pipes are made of steel. The connections are welded.

### FEATURES AND BENEFITS

- Substation for apartment buildings
- Indirect heating, connections for domestic hot water tank
- Thermostatic or electronic regulation of heating (HE) temperature
- Capacity: 180 - 320 kW heating
- Minimum space required for installation
- Plate heat exchanger made of stainless steel
- Pipes made of steel
- Pipes size DN 32 are welded

# Termix VX Compact 32

## Circuit diagram - example

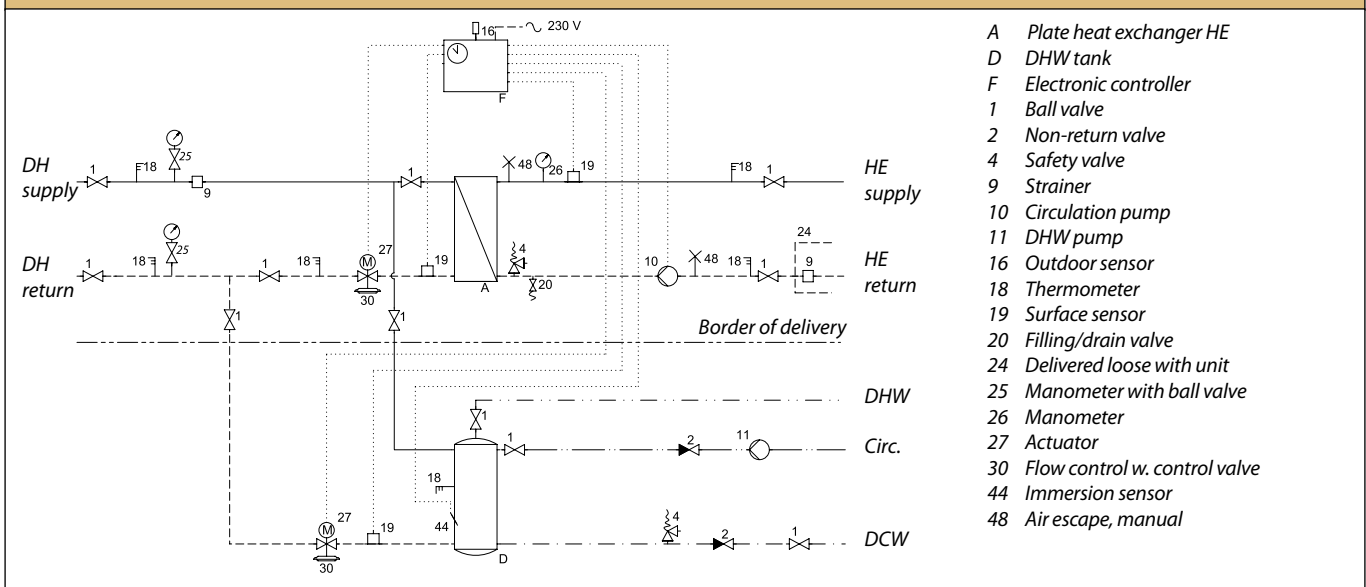

### Technical parameters:

Nominal pressure: PN 16  
 DH supply temperature:  $T_{max} = 120\text{ }^{\circ}\text{C}$   
 Brazing material (HEX): Copper

**Weight:** 80 kg

**Dimensions (mm):**  
 H 1000 x W 800 x D 450

**Electrical supply:** 230 V AC

### Connections:

- 1 District heating (DH) supply
- 2 District heating (DH) return
- 3 Heating (HE) supply
- 4 Heating (HE) return
- 5 Tank (DHW) supply
- 6 Tank (DCW) return

### Connections sizes:

DH + HE: G 1" - 1 1/2" (int. thread)  
 DCW + DHW: G 3/4" - 1" (int. thread)

### Options:

- White-lacquered steel cover
- Thermostat with safety monitor
- Thermostatic or electronic controls for DHW tank (delivered loose with unit)
- Differential pressure controller and separate motorized valves
- Fitting piece and sensor pockets for insertion of a heat meter



Connections, bottom fed

\* Flow to tank \*\* Return to tank

## Heating: Capacity examples

Heating Capacity kW	Heating circuit Primary $^{\circ}\text{C}$	Heating circuit Secondary $^{\circ}\text{C}$	Pressure loss Primary kPa	Flow rate Secondary l/h
VX 32/40	90/64	60/80	50	7740
VX 28/32	90/45	40/70	50	5733
VX 32/40	90/64	60/80	50	9460
VX 32/32	90/45	40/70	50	6880
VX 32/40	90/45	40/70	50	7453
VX 32/40	90/45	40/70	50	8026
VX 32/40	90/45	40/70	50	8600
VX 32/40	90/45	40/70	50	9173

**Gemina Termix A/S** · Member of the Danfoss Group · Navervej 15-17 · DK-7451 Sunds · Denmark

Tel.: +45 9714 1444 · Fax: +45 9714 1159 · mail@termix.dk · www.heating.danfoss.com

Danfoss can accept no responsibility for possible errors in catalogues, brochures and other printed material. Danfoss reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without consequential changes being necessary in specifications already agreed. All trademarks in this material are property of the respective companies. Danfoss and the Danfoss logotype are trademarks of Danfoss A/S. All rights reserved.